

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L149147001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		450 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2200...2700
On-mode power (P_{on}), expressed in W		6,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	97
Outer dimensions without separate control gear, light-	Height	105	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	37		
	Depth	37		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,460 0,415	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	89	Survival factor	0,70	
the lumen maintenance factor	0,70			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample : 1
 Specification :
 Sample No. : L149147001-1
 Manufacturer :


Date : 2017-02-20 10:47:48
 Sam. Status :
 Instrument : HaasSuite(EVERFINE)
 Test by : Schiefer
 Assessor : damin

Test Condition

Temperature : 25.3Deg
 WL Range : 380nm-780nm
 Test Mode : Fast Test

RH : 65.0%
 IP : 51407 (78%)
 T : 39 ms
 Sensitivity : High

Spectrum

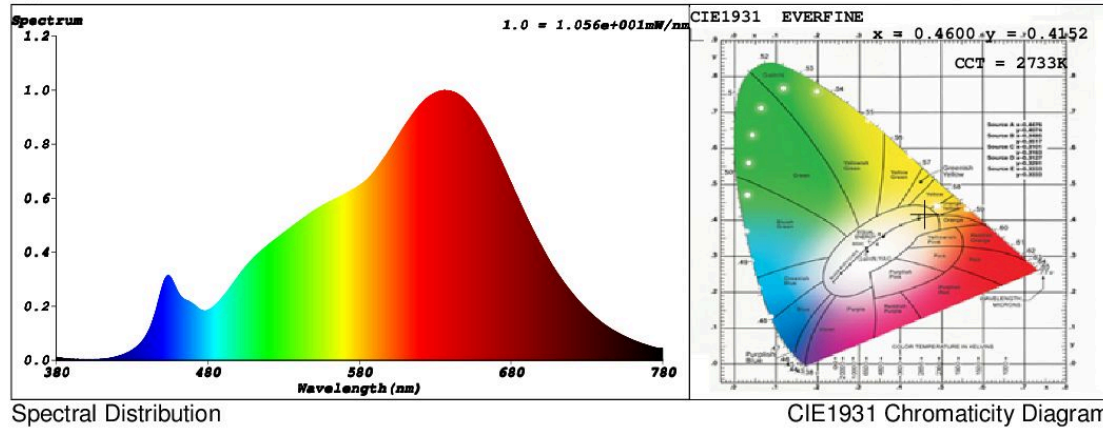

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4600$ $y = 0.4152$ / $u' = 0.2606$ $v' = 0.5291$ ($duv=1.67e-03$)
 CCT= 2733K Prcp WL: $L_d=583.5nm$ Purity=62.7%
 Peak WL: $L_p=637nm$ FWHM: $=156.4nm$ Ratio:R=26.8% G=70.7% B=2.6%

Render Index: $R_a = 98.2$

$R_1=100$ $R_2=99$ $R_3=96$ $R_4=99$ $R_5=99$ $R_6=99$ $R_7=98$
 $R_8=96$ $R_9=89$ $R_{10}=96$ $R_{11}=97$ $R_{12}=87$ $R_{13}=100$ $R_{14}=97$ $R_{15}=97$
 LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters


Flux = 458.42 lm Eff. : 70.84 lm/W $F_e = 1.7467$ W

Electrical parameters

V = 230.1 V I = 0.03500 A P = 6.471 W PF = 0.8035

Schiefer Professional Lighting
www.professional-lighting.eu

Model placed on the Union market from 01/09/2021



EPREL registration number: 831322

<https://eprel.ec.europa.eu/qr/831322>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands