## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

<b>Supplier's name or trade mark:</b>	Ecosense Lighting
---------------------------------------	-------------------

Supplier's address: Public contact, Via XXV Aprile 75B, Casorate Sempione (VA) 21011, Italy

Model identifier: SR111-12-08D-927-03-S3

Tyne	οf	liσht	sourc	۵.
IVDE	UI.	HEIIL	Souit	┖.

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type	G53		
(or other electric interface)			
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with spe- cific dimmers


## **Product parameters**

Product parameters				
Parameter		Value	Parameter	Value
	General product parameters:			
<u> </u>	mption in on- 00 h), rounded st integer	13	Energy efficiency class	G
dicating if it refe a sphere (360º)	s flux (φuse), in- ers to the flux in , in a wide cone arrow cone (90º)	515 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	12,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
(P <sub>net</sub> ) for CLS, (	tandby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	95
Outer dimen-	Height	57	Spectral power dis-	See image
sions without	Width	111	tribution in the	in last page
separate control gear, light-	Depth	111	range 250 nm to 800 nm, at full-load	

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	66
		Chromaticity coordi-	0,459
		nates (x and y)	0,412
Parameters for directional light sources:			
Peak luminous intensity (cd)	15 520	Beam angle in degrees, or the range of beam angles that can be set	8
Parameters for LED and OLED light sources:			
R9 colour rendering index value	95	Survival factor	1,00
the lumen maintenance factor	0,96		

(a)<sub>'-'</sub>: not applicable;

(b)<sub>'-'</sub> : not applicable;

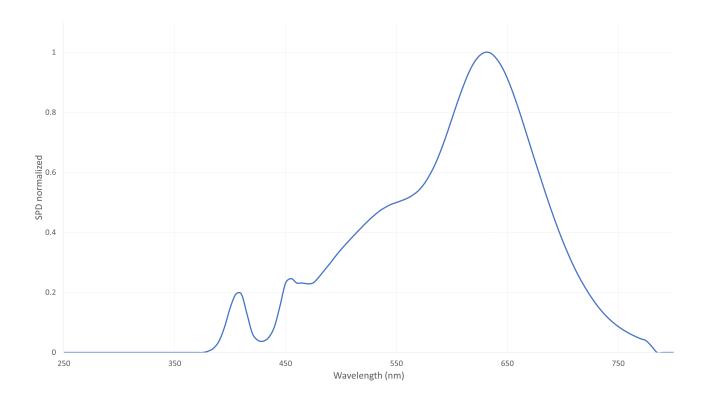

Model placed on the Union market from 01/01/2022



**EPREL registration number:** 875737 https://eprel.ec.europa.eu/qr/875737

**Supplier:** Ecosense Lighting (Importer) Website:

Customer care service:

Name: Public contact Website: https://www.ecosenseligh

ting.com/

Email: techsupport-soraa@ecosenselighting.com Phone: +44 (0)1753 628 499

**Address:** 

Via XXV Aprile 75B, Casorate Sempione (VA)

21011, Italy