

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SONOFF

**Supplier's address:** EUREP GmbH, Unterlettenweg 1a, 85051 Ingolstadt, DE

**Model identifier:** B05-BL-A60

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	-		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	800 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700...6500
On-mode power ( $P_{on}$ ), expressed in W	9,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,50
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,36	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	113	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	60	
	Depth	8	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,312 0,331
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	31	Survival factor	0,99
the lumen maintenance factor	0,93		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,94	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0


(a)-: not applicable;

(b)-: not applicable;

Spectral power distribution

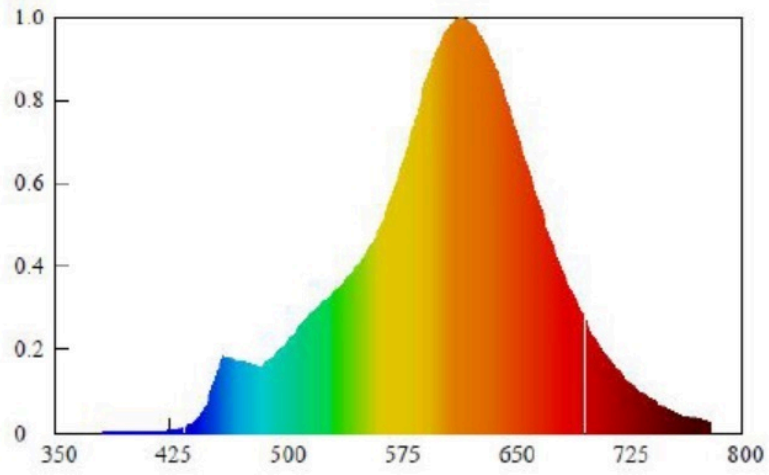

Model placed on the Union market from 26/10/2021



**EPREL registration number:** 1026746

<https://eprel.ec.europa.eu/qr/1026746>

**Supplier:** EUREP GmbH (Authorised representative)

**Website:**

**Customer care service:**

**Name:** EUREP GmbH

**Website:**

**Email:** [eurep@eurep-gmbh.com](mailto:eurep@eurep-gmbh.com)

**Phone:** 084188697744

**Address:**

Unterlettenweg 1a  
85051 Ingolstadt  
Germany