

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L022935427-1

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	240 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	48	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,457 0,411
Parameters for directional light sources:			
Peak luminous intensity (cd)	500	Beam angle in degrees, or the range of beam angles that can be set	35
Parameters for LED and OLED light sources:			
R9 colour rendering index value	6	Survival factor	0,70
the lumen maintenance factor	0,70		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,70	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,9

(a).': not applicable;

(b).': not applicable;


SPL Spectrum Test Report

Sample :	Date :	2021-07-22 16:11:09
Specification : L022935427-1	Sam. Status :	
Sample No. :	Instrument :	HaasSuite(EVERFINE)
Manufacturer : Renee	Test by :	Renee
	Assessor :	damin

Test Condition

Temperature : 25.3Deg	RH : 65.0%
WL Range : 380nm-780nm	IP : 51371 (78%)
Test Mode : Fast Test	T : 69 ms
	Sensitivity : High

Spectrum

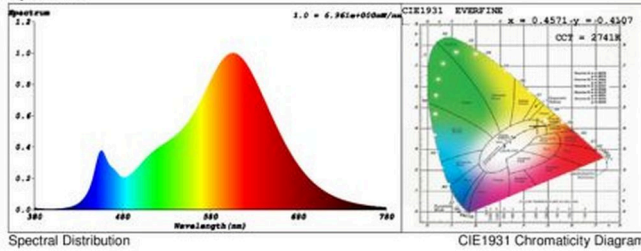

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4571$ $y = 0.4107$ / $u' = 0.2606$ $v' = 0.5270$ ($duv=2.94e-04$)
 CCT= 2741K Prcp WL: Ld=583.9nm Purity=60.5%
 Peak WL: Lp=607nm FWHM: =112.0nm Ratio:R=24.9% G=72.5% B=2.6%

Render Index: Ra = 82.5

R1 =82 R2 =94 R3 =93 R4 =80 R5 =82 R6 =94 R7 =80
 R8 =56 R9 =6 R10=86 R11=80 R12=78 R13=85 R14=97 R15=73
 LEVEL:OUT WHITE:ANSI_2700K


Photometric & Radiometric Parameters

Flux = 315.76 lm Eff. : 129.42 lm/W Fe = 972.70 mW

Electrical parameters

V = 229.8 V I = 0.01434 A P = 2.440 W PF = 0.7406

Model placed on the Union market from 01/09/2021



EPREL registration number: 706628

<https://eprel.ec.europa.eu/qr/706628>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands