

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L642712357

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	690 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	12,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	91	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	95	
	Depth	95	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,451 0,406
Parameters for directional light sources:			
Peak luminous intensity (cd)	1 300	Beam angle in degrees, or the range of beam angles that can be set	35
Parameters for LED and OLED light sources:			
R9 colour rendering index value	62	Survival factor	1,00
the lumen maintenance factor	0,72		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a)'.-' : not applicable;

(b)'.-' : not applicable;


SPL Spectrum Test Report

Sample	:		Date	:	2021-07-21 10:22:11
Specification	:	L642712357	Sam. Status	:	
Sample No.	:	1	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Renee	Test by	:	Renee
			Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	47400 (72%)
Test Mode	:	Fast Test	T	:	26 ms
			Sensitivity	:	High

Spectrum

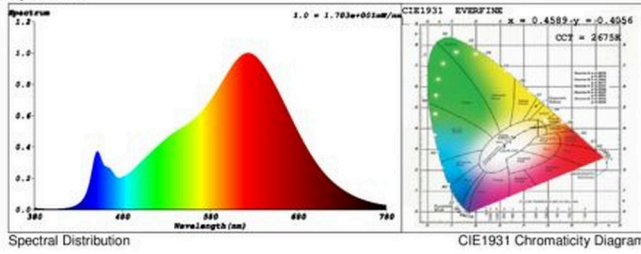

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4589$ $y = 0.4056$ / $u' = 0.2641$ $v' = 0.5253$ ($duv = -1.77e-03$)
 CCT = 26756K Prcp WL: Ld=584.9nm Purity=59.5%
 Peak WL: Lp=623nm FWHM: =138.3nm Ratio:R=27.1% G=70.2% B=2.7%

Render Index: Ra = 94.0

R1 =95 R2 =99 R3 =98 R4 =95 R5 =96 R6 =97 R7 =91
 R8 =82 R9 =62 R10=97 R11=96 R12=88 R13=97 R14=99 R15=91
 LEVEL:OUT WHITE:ANSI_2700K


Photometric & Radiometric Parameters

Flux = 749.99 lm Eff. : 92.66 lm/W Fe = 2.6572 W

Electrical parameters

V = 229.9 V I = 0.03991 A P = 8.094 W PF = 0.8823

Model placed on the Union market from 29/04/2021



EPREL registration number: 706661

<https://eprel.ec.europa.eu/qr/706661>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands