Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Star Trading

Supplier's address: Help desk, Star Street 1, 51250 Svenljunga, SE

Model identifier: 347-68-2

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		6	Energy efficiency class	E
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)		540 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W		5,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	54	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	50		
	Depth	50		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		Yes	If yes, equivalent power (W)	75
			Chromaticity coordinates (x and y)	0,458 0,410
Parameters for directional light sources:				
Peak luminous intensity (cd)		1 200	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:				
R9 colour rendering index value		1	Survival factor	0,90
the lumen maintenance factor		0,93		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,73	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		1,0	Stroboscopic effect metric (SVM)	0,4

[a] '-' : not applicable;

[b] '-' : not applicable;

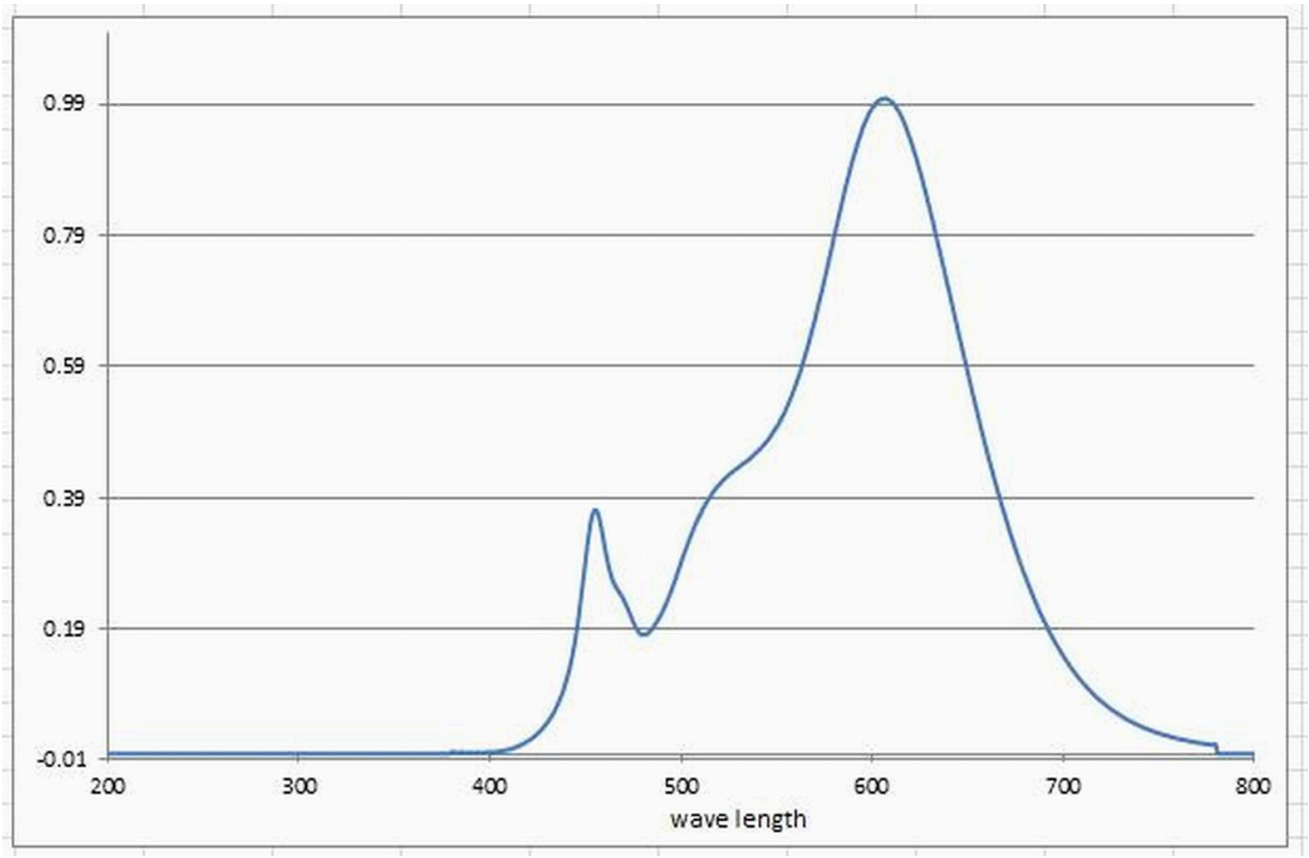
0.99
0.79
0.59
0.39
0.19
-0.01
200
300
400
500
600
700
800
wave length

Model placed on the Union market from 21/02/2022 to 07/11/2025.

EPREL registration number: 728103

https://eprel.ec.europa.eu/qr/728103

Supplier: Star Trading i Svenljunga AB (Manufacturer) **Website:** www.startrading.com

Customer care service:

Name: Help desk **Website:** www.startrading.com

Email: kundtjanst@startrading.com **Phone:** +4632512000

Address:
Star Street 1
51250 Svenljunga
Sweden