

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L229333230-1

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba22d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	390 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	3,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	58	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	27	
	Depth	27	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,444 0,400
Parameters for LED and OLED light sources:			
R9 colour rendering index value	4	Survival factor	0,90
the lumen maintenance factor	0,93		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2017-11-01 11:03:20
Specification	: L229333230-1	Sam. Status	:
Sample No.	: L229333230-1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	:
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 45972 (70%)
Test Mode	: Fast Test	T	: 46 ms
		Sensitivity	: High

Spectrum

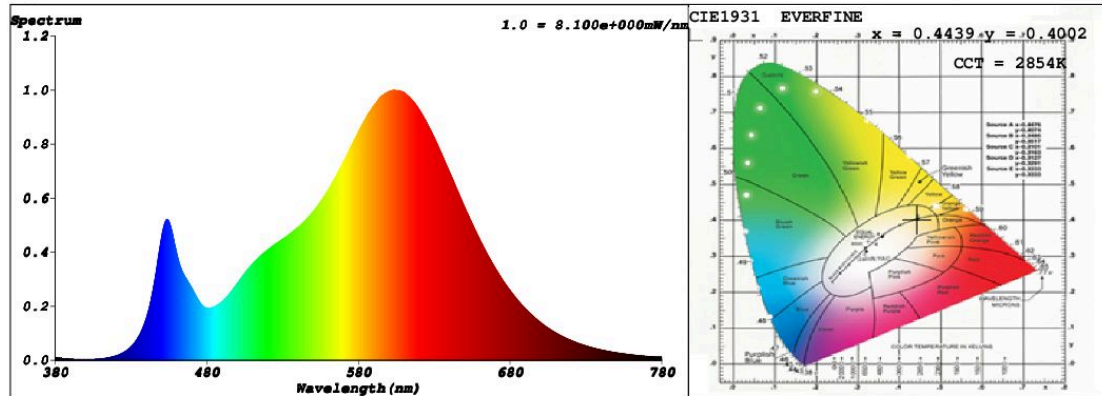

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4439$ $y = 0.4002$ / $u' = 0.2568$ $v' = 0.5209$ ($duv = -2.40e-03$)

CCT= 2854K Prcp WL: $L_d = 584.3nm$ Purity=53.4%

Peak WL: $L_p = 603nm$ FWHM: $= 113.9nm$ Ratio: R=24.0% G=73.4% B=2.6%

Render Index: $R_a = 81.7$

R1 =81 R2 =93 R3 =93 R4 =79 R5 =81 R6 =92 R7 =80

R8 =55 R9 =4 R10=84 R11=78 R12=75 R13=84 R14=97 R15=73

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 376.78 lm Eff. : 123.72 lm/W $F_e = 1.1512 W$

Electrical parameters

V = 230.0 V I = 0.03066 A P = 3.046 W PF = 0.4319

Schiefer Professional Lighting

www.professional-lighting.eu

Model placed on the Union market from 26/04/2021



EPREL registration number: 728281

<https://eprel.ec.europa.eu/qr/728281>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands