

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023960105

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	320 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 000
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	140	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	64	
	Depth	64	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,523 0,415
Parameters for LED and OLED light sources:			
R9 colour rendering index value	10	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,75	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2021-06-18 11:23:47
Specification	: LF023960105	Sam. Status	:
Sample No.	: LF023960105-1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 51326 (78%)
Test Mode	: Fast Test	T	: 56 ms
		Sensitivity	: High

Spectrum

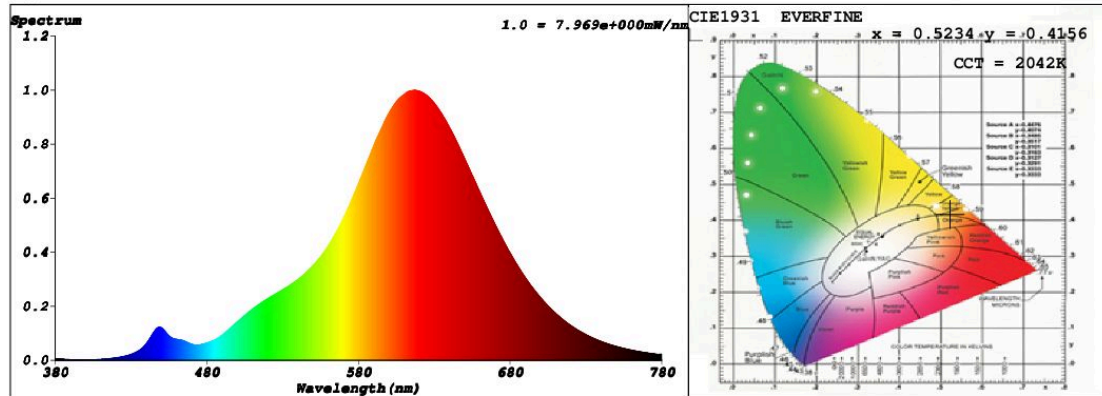

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.5234$ $y = 0.4156$ / $u' = 0.3016$ $v' = 0.5389$ ($duv=5.47e-04$)

CCT= 2042K Prcp WL: Ld=588.4nm Purity=81.9%

Peak WL: Lp=617nm FWHM: =102.9nm Ratio:R=32.8% G=66.1% B=1.2%

Render Index: Ra = 81.6

R1 =80 R2 =92 R3 =93 R4 =79 R5 =81 R6 =94 R7 =79

R8 =54 R9 =10 R10=85 R11=80 R12=85 R13=83 R14=97 R15=71

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 288.77 lm Eff. : 60.73 lm/W Fe = 998.92 mW

Electrical parameters

V = 229.9 V I = 0.02454 A P = 4.755 W PF = 0.8426

Schiefer Professional Lighting

www.spl-lighting.com