

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023850301

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	320 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	120	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,478 0,421
Parameters for LED and OLED light sources:			
R9 colour rendering index value	65	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:	Date	:	2021-03-18 09:30:07
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	Schiefer
		Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	54031 (82%)
Test Mode	:	Fast Test	T	:	65 ms
			Sensitivity	:	High

Spectrum

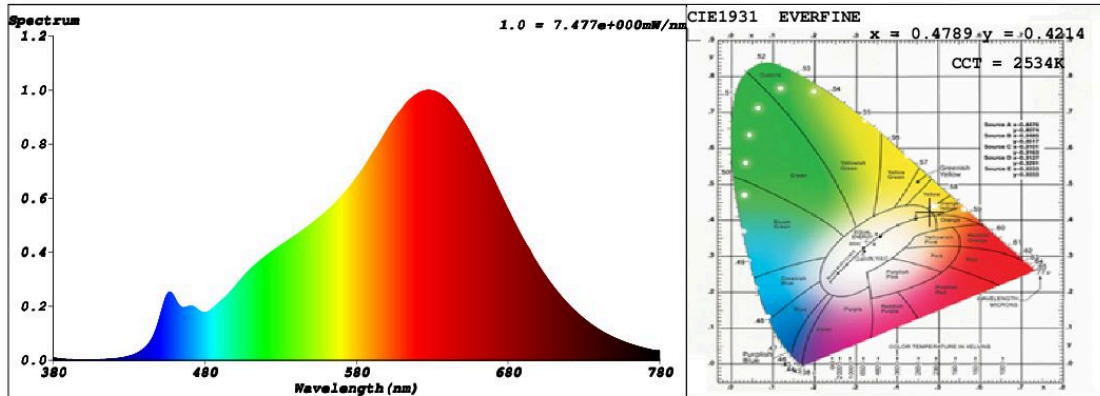

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4789$ $y = 0.4214$ / $u' = 0.2698$ $v' = 0.5342$ ($duv=2.56e-03$)

CCT= 2534K Prcp WL: $L_d=584.3nm$ Purity=70.2%

Peak WL: $L_p=628nm$ FWHM: $=136.3nm$ Ratio:R=28.1% G=69.6% B=2.3%

Render Index: $R_a = 94.5$

R1 =95 R2 =98 R3 =99 R4 =94 R5 =95 R6 =99 R7 =92

R8 =83 R9 =65 R10=95 R11=97 R12=87 R13=96 R14=99 R15=90

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 318.50 lm Eff. : 83.59 lm/W $F_e = 1.1562 W$


Electrical parameters

V = 229.9 V I = 0.02113 A P = 3.810 W PF = 0.7841

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 19/03/2021



EPREL registration number: 583168

<https://eprel.ec.europa.eu/qr/583168>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands