

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023925002

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	140 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	180	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	125	
	Depth	125	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,509 0,412
Parameters for LED and OLED light sources:			
R9 colour rendering index value	84	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;

光源光谱测试报告

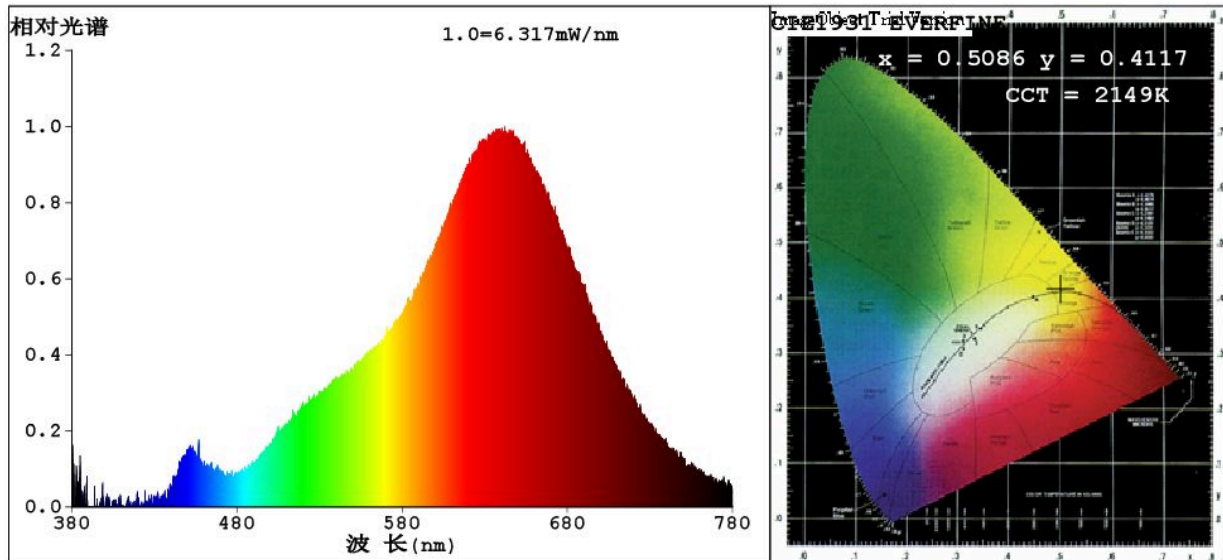

颜色参数:

色品坐标: $x=0.5086$ $y=0.4117$ / $u'=0.2938$ $v'=0.5352$
 相关色温: CCT=2149K (色差 $Duv=-0.0011$) 主波长: $\lambda_d=588.0nm$ 色纯度: Purity=76.2%
 色比: R=33.1% G=65.3% B=1.6% 峰值波长: $\lambda_p=642.1nm$ 半峰带宽: FWHM=118.0nm
 显色指数: Ra=97.0
 R1 =100 R2 =99 R3 =98 R4 =98 R5 =99 R6 =95 R7 =95
 R8 =92 R9 =84 R10=99 R11=93 R12=93 R13=99 R14=97 R15=96

光度参数:

光通量 $\Phi = 209.7 lm$ 光效: 57.09 lm/W 辐射通量 $\Phi_e = 903.4 mW$

电参数:

电压 $V = 230.43 V$ 电流 $I = 0.01785 A$ 功率 $P = 3.673 W$ 功率因数 PF = 0.8932

分级: OUT 白光分类: OUT

仪器状态: 积分时间 $T = 3206 ms$ $I_p = 20763 (32\%)$

产品型号: LF023925002
 测试人员: QIU
 环境温度: 25.3°C
 制造厂商:

产品编号: 4
 测试日期: 2021-05-07
 环境湿度: 65.0%
 备注: