

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023851502

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	140 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W	1,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	120	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,466 0,407
Parameters for LED and OLED light sources:			
R9 colour rendering index value	59	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2017-12-12 13:43:53
Specification	:	Sam. Status	:
Sample No.	: LF023851502-1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	:
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 50049 (76%)
Test Mode	: Fast Test	T	: 166 ms
		Sensitivity	: High

Spectrum

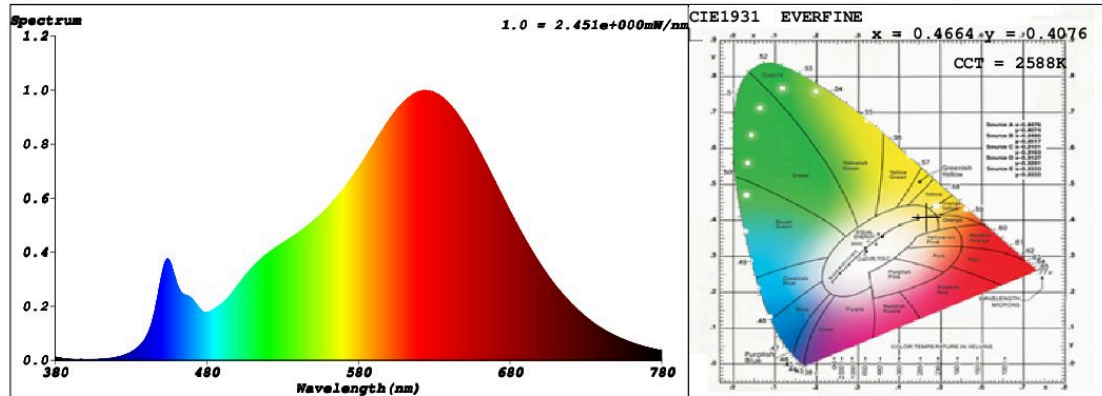

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4664$ $y = 0.4076$ / $u' = 0.2681$ $v' = 0.5272$ ($duv = -1.59e-03$)

CCT= 2588K Prcp WL: $L_d = 585.3nm$ Purity=62.3%

Peak WL: $L_p = 624nm$ FWHM: $= 138.3nm$ Ratio: R=27.6% G=70.0% B=2.4%

Render Index: $R_a = 93.0$

R1 =94 R2 =98 R3 =98 R4 =93 R5 =94 R6 =97 R7 =90

R8 =80 R9 =59 R10=95 R11=95 R12=86 R13=95 R14=100 R15=89

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 107.52 lm Eff. : 68.80 lm/W Fe = 391.39 mW

Electrical parameters

V = 230.1 V I = 0.008251 A P = 1.563 W PF = 0.8232

Schiefer Professional Lighting

www.professional-lighting.eu