

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L022319027

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	180 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	2,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	50	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	13	
	Depth	13	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,417
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	0,90
the lumen maintenance factor	0,93		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,75	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9

(a)-: not applicable;

(b)-: not applicable;

SPL Spectrum Test Report

Sample :
 Specification : L022319027
 Sample No. : 1
 Manufacturer :


Date : 2021-08-11 15:17:20
 Sam. Status :
 Instrument : HaasSuite(EVERFINE)
 Test by : Renee
 Assessor : damin

Test Condition

Temperature : 25.3Deg
 WL Range : 380nm-780nm
 Test Mode : Fast Test

RH : 65.0%
 IP : 51435 (78%)
 T : 111 ms
 Sensitivity : High

Spectrum

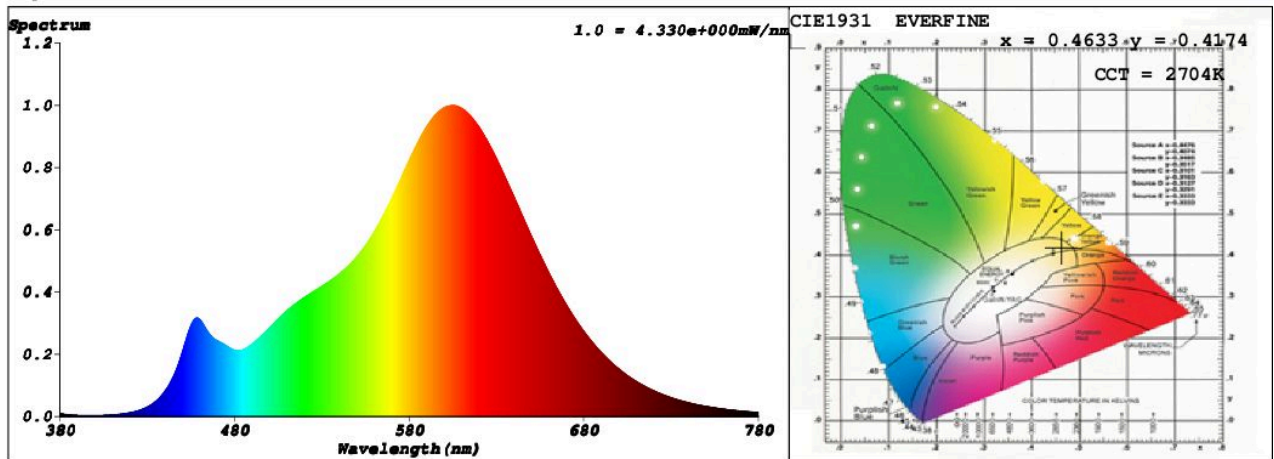

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4633$ $y = 0.4174$ / $u' = 0.2617$ $v' = 0.5304$ ($duv=2.18e-03$)

CCT= 2704K Prcp WL: $L_d=583.5nm$ Purity=64.4%

Peak WL: $L_p=605nm$ FWHM: =109.2nm Ratio:R=24.9% G=72.6% B=2.5%

Render Index: $R_a = 81.4$

R1 =80 R2 =93 R3 =92 R4 =78 R5 =81 R6 =94 R7 =79

R8 =54 R9 =1 R10=85 R11=78 R12=77 R13=84 R14=96 R15=71

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 194.93 lm Eff. : 140.40 lm/W Fe = 593.17 mW

Electrical parameters

V = 229.8 V I = 0.008045 A P = 1.388 W PF = 0.7511

Schiefer Professional Lighting

www.spl-lighting.com