

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

Model identifier: L277250827

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions	Height	Spectral power distribution in the	See image in last page
	Width		
			45

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	45	range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,456
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor		0,90
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,92	Colour consistency in McAdam ellipses		6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)		-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)		0,4

(a)-: not applicable;

(b)-: not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2021-01-04 16:10:16
Specification	: L277250827	Sam. Status	:
Sample No.	: L277250827 01	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 51085 (78%)
Test Mode	: Fast Test	T	: 45 ms
		Sensitivity	: High

Spectrum

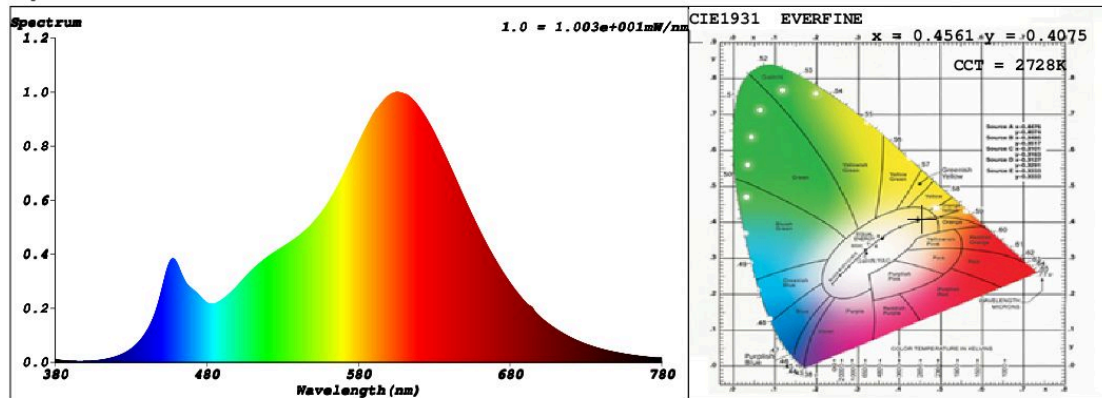

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4561$ $y = 0.4075$ / $u' = 0.2615$ $v' = 0.5256$ ($duv = -8.40e-04$)

CCT= 2728K Prcp WL: Ld=584.3nm Purity=59.2%

Peak WL: Lp=606nm FWHM: =111.8nm Ratio:R=25.2% G=72.2% B=2.7%

Render Index: Ra = 83.2

R1 =83 R2 =95 R3 =92 R4 =80 R5 =84 R6 =95 R7 =80

R8 =57 R9 =10 R10=88 R11=81 R12=81 R13=86 R14=96 R15=75

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 452.50 lm Eff. : 98.94 lm/W Fe = 1.4148 W

Electrical parameters

V = 229.8 V I = 0.02818 A P = 4.573 W PF = 0.7061

Schiefer Professional Lighting

www.spl-lighting.com