## **Product Information Sheet**


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources						
Supplier's name or trade mark: Occhio GmbH						
Supplier's address: Productmanagement, Occhio GmbH Wiener Platz 7 81667 München						
Model identifier: Mito soffitto 40 pro						
Type of light so	urce:					
Lighting technology used:		LED	Non-directional or directional:	DLS		
Light source cap-type		n.a.				
(or other electric interface)						
Mains or non-mains:		NMLS	Connected light source (CLS):	No		
Colour-tuneable light source:		No	Envelope:	-		
High luminance light source:		No				
Anti-glare shield:		No	Dimmable:	Only with spe- cific dimmers		
Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		40	Energy efficiency class	G		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 700 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 3 000 or 4 000		
On-mode power (P <sub>on</sub> ), expressed in W		40,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	95		
Outer dimen-	Height	30	Spectral power dis-	See image		
sions without	Width	400	tribution in the	in last page		
separate con- trol gear, light-		400	range 250 nm to 800 nm, at full-load			

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,380			
		nates (x and y)	0,380			
Parameters for directional light sources:						
Peak luminous intensity (cd)	361	Beam angle in degrees, or the range of beam angles that can be set	80			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	80	Survival factor	-			
the lumen maintenance factor	-					

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

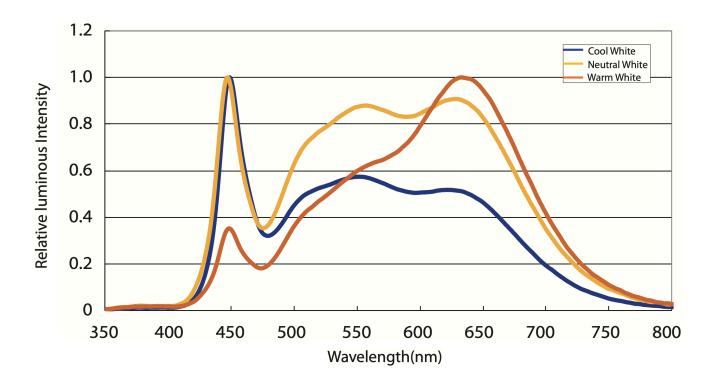

Model placed on the Union market from 01/09/2021



**EPREL registration number:** 817817 https://eprel.ec.europa.eu/qr/817817

Supplier: Occhio GmbH (Manufacturer) Website:

**Customer care service:** 

Name: Productmanagement Website:

Email: info@occhio.com Phone: +49 894477860

Address:

Occhio GmbH Wiener Platz 7 81667 München