

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L022172827

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	310 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	3,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	49	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	17	
	Depth	17	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,466 0,415
Parameters for LED and OLED light sources:			
R9 colour rendering index value	5	Survival factor	0,90
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,4

(a)-: not applicable;

(b)-: not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2021-03-17 13:38:12
Specification	: L022172827	Sam. Status	:
Sample No.	: L022172827 01	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 52306 (80%)
Test Mode	: Fast Test	T	: 60 ms
		Sensitivity	: High

Spectrum

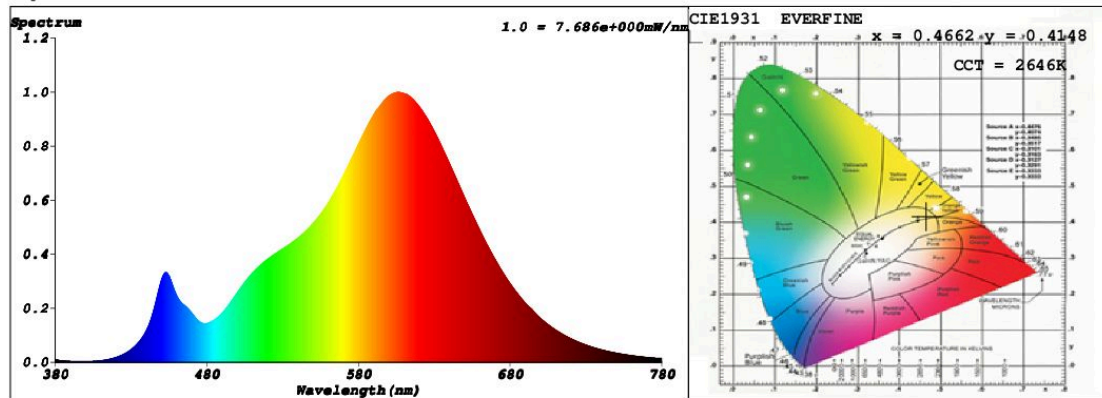

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4662$ $y = 0.4148$ / $u' = 0.2647$ $v' = 0.5299$ ($duv=1.03e-03$)

CCT= 2646K Prcp WL: Ld=584.2nm Purity=64.4%

Peak WL: Lp=606nm FWHM: =111.5nm Ratio:R=25.5% G=72.4% B=2.1%

Render Index: Ra = 82.0

R1 =81 R2 =92 R3 =95 R4 =80 R5 =81 R6 =91 R7 =81

R8 =56 R9 =5 R10=82 R11=80 R12=76 R13=83 R14=98 R15=72

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 343.19 lm Eff. : 108.13 lm/W Fe = 1.0559 W

Electrical parameters

V = 229.9 V I = 0.02811 A P = 3.174 W PF = 0.4911

Schiefer Professional Lighting

www.spl-lighting.com