

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L024104509

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	280 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	130	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	45	
	Depth	45	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,509 0,413
Parameters for LED and OLED light sources:			
R9 colour rendering index value	71	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


Spectrum Test Report

Sample : 1	Date : 2016-07-18 11:08:56
Specification : E14	Sam. Status :
Sample No. : 61	Instrument : HaasSuite(EVERFINE)
Manufacturer : Schiefer	Test by : Schiefer
	Assessor : damin

Test Condition

Temperature : 25.3Deg	RH : 65.0%
WL Range : 380nm-780nm	IP : 53904 (82%)
Test Mode : Fast Test	T : 56 ms
	Sensitivity : High

Spectrum

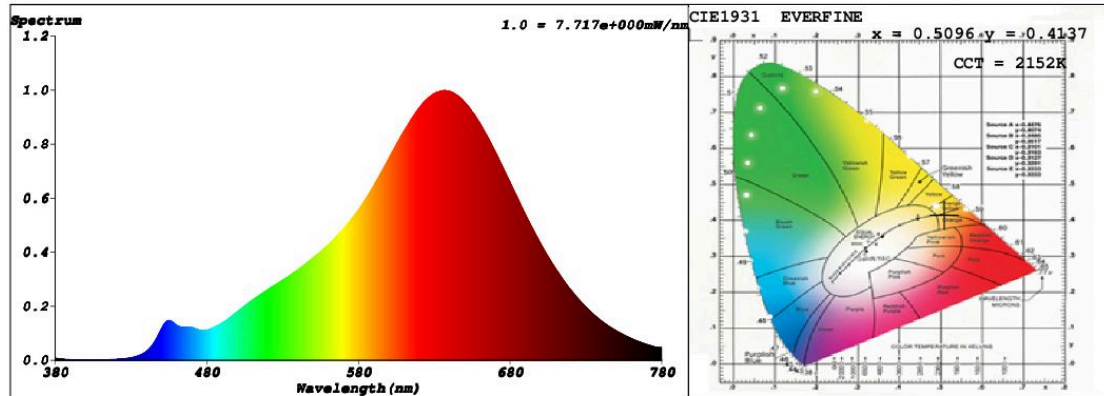

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.5096$ $y = 0.4137$ / $u' = 0.2935$ $v' = 0.5361$ ($duv = -4.26e-04$)

CCT= 2152K Prcp WL: Ld=587.8nm Purity=77.1%

Peak WL: Lp=637nm FWHM: =121.9nm Ratio:R=32.7% G=65.6% B=1.8%

Render Index: Ra = 95.2

R1 =97 R2 =100 R3 =98 R4 =97 R5 =97 R6 =96 R7 =92

R8 =85 R9 =71 R10=99 R11=99 R12=91 R13=98 R14=99 R15=92

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 270.55 lm Eff. : 69.92 lm/W Fe = 1.1165 W


Electrical parameters

V = 230.1 V I = 0.02034 A P = 3.869 W PF = 0.8266

EVERFINE CORPORATION

<http://www.everfine.cn>

Model placed on the Union market from 01/09/2021



EPREL registration number: 831220

<https://eprel.ec.europa.eu/qr/831220>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands