

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

Model identifier: L024358830

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	440 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	4,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,440
Parameters for LED and OLED light sources:				
R9 colour rendering index value	63		Survival factor	0,90
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50		Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,2		Stroboscopic effect metric (SVM)	0,1

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2020-07-06 15:34:43
Specification	: L024358830	Sam. Status	:
Sample No.	: L024358830 02	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 50842 (78%)
Test Mode	: Fast Test	T	: 46 ms
		Sensitivity	: High

Spectrum

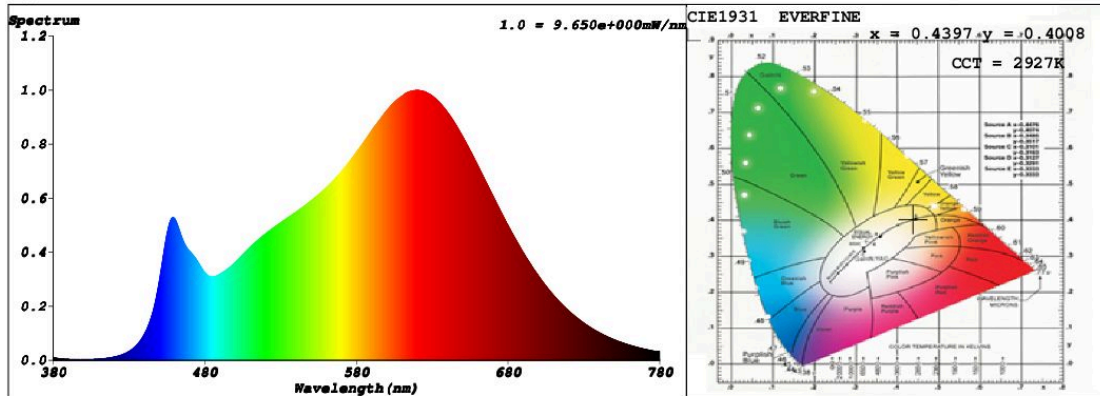

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4397$ $y = 0.4008$ / $u' = 0.2538$ $v' = 0.5205$ ($duv = -1.68e-03$)

CCT= 2927K Prcp WL: Ld=583.7nm Purity=52.3%

Peak WL: Lp=620nm FWHM: =152.5nm Ratio:R=25.1% G=71.5% B=3.4%

Render Index: Ra = 92.7

R1 =95 R2 =99 R3 =95 R4 =92 R5 =95 R6 =95 R7 =89

R8 =81 R9 =63 R10=99 R11=94 R12=82 R13=98 R14=98 R15=91

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 465.64 lm Eff. : 103.00 lm/W Fe = 1.6341 W

Electrical parameters

V = 229.9 V I = 0.03541 A P = 4.521 W PF = 0.5553

Schiefer Professional Lighting

www.spl-lighting.com