

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L223864830

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba22d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	640 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	7,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	108	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	38	
	Depth	38	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,444 0,408
Parameters for LED and OLED light sources:			
R9 colour rendering index value	6	Survival factor	0,90
the lumen maintenance factor	0,90		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,3	Stroboscopic effect metric (SVM)	0,3

(a)-: not applicable;

(b)-: not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2018-11-30 13:18:18
Specification	: L223864830	Sam. Status	:
Sample No.	: L223864830 1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	: Tenia	Test by	:
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 47285 (72%)
Test Mode	: Fast Test	T	: 30 ms
		Sensitivity	: High

Spectrum

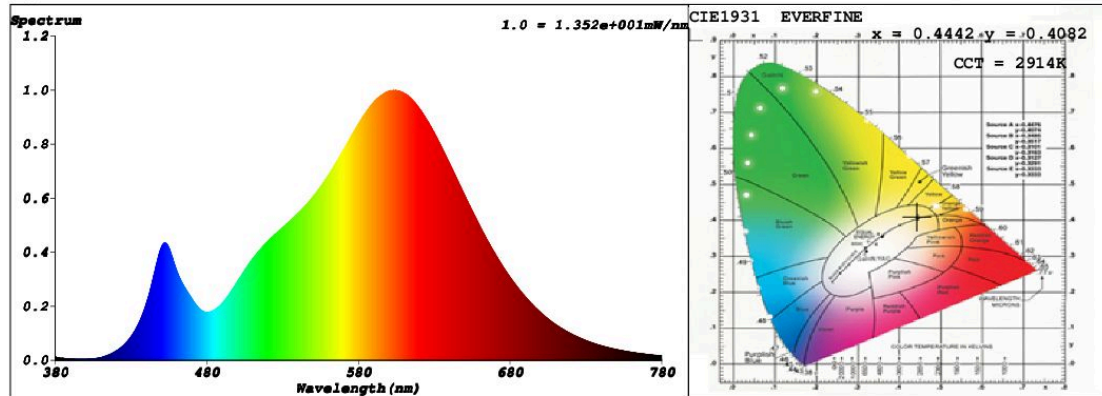

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4442$ $y = 0.4082$ / $u' = 0.2535$ $v' = 0.5241$ ($duv=6.72e-04$)

CCT= 2914K Prcp WL: Ld=583.0nm Purity=55.9%

Peak WL: Lp=605nm FWHM: =128.3nm Ratio:R=23.3% G=74.4% B=2.4%

Render Index: Ra = 81.8

R1 =80 R2 =90 R3 =97 R4 =79 R5 =80 R6 =88 R7 =83

R8 =58 R9 =6 R10=77 R11=78 R12=70 R13=82 R14=99 R15=73

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 658.58 lm Eff. : 85.79 lm/W Fe = 2.0243 W

Electrical parameters

V = 230.0 V I = 0.06557 A P = 7.676 W PF = 0.5091

Schiefer Professional Lighting

www.professional-lighting.eu