

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023800888

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	550 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W	6,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	190	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	150	
	Depth	150	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,484 0,419
Parameters for LED and OLED light sources:			
R9 colour rendering index value	61	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample :	Date : 2019-11-18 16:21:30
Specification : LF023800888	Sam. Status :
Sample No. : LF023800888 02	Instrument : HaasSuite(EVERFINE)
Manufacturer :	Test by : Schiefer
	Assessor : damin

Test Condition

Temperature : 25.3Deg	RH : 65.0%
WL Range : 380nm-780nm	IP : 57983 (88%)
Test Mode : Fast Test	T : 42 ms
	Sensitivity : High

Spectrum

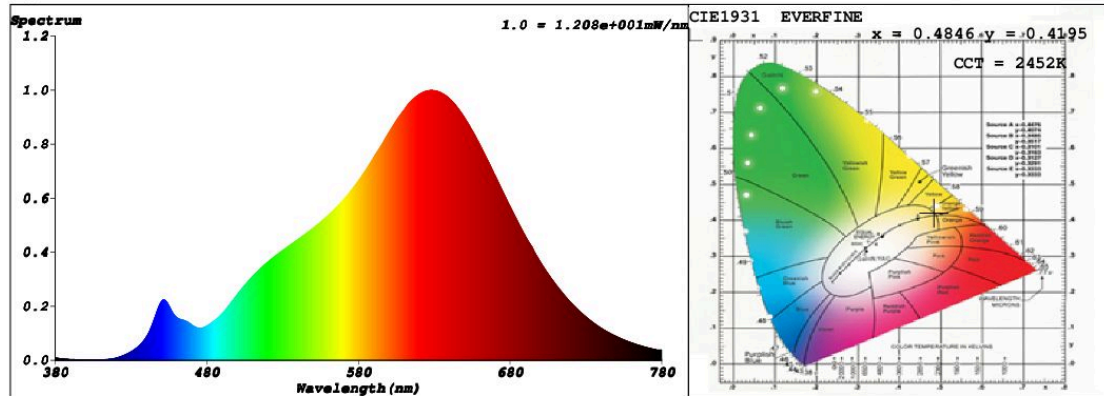

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4846$ $y = 0.4195$ / $u' = 0.2744$ $v' = 0.5344$ ($duv=1.66e-03$)

CCT= 2452K Prcp WL: Ld=585.1nm Purity=71.4%

Peak WL: Lp=628nm FWHM: =134.0nm Ratio:R=28.7% G=69.3% B=1.9%

Render Index: Ra = 93.7

R1 =94 R2 =97 R3 =98 R4 =95 R5 =94 R6 =97 R7 =93

R8 =82 R9 =61 R10=91 R11=97 R12=87 R13=94 R14=98 R15=89

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 501.70 lm Eff. : 86.57 lm/W Fe = 1.8444 W

Electrical parameters

V = 229.8 V I = 0.03256 A P = 5.795 W PF = 0.7744

Schiefer Professional Lighting

www.spl-lighting.com