

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023860209

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	190 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200
On-mode power (P_{on}), expressed in W	2,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	143	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	64	
	Depth	64	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,501 0,412
Parameters for LED and OLED light sources:			
R9 colour rendering index value	90	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2018-06-18 15:45:55
Specification	: LF023860209	Sam. Status	:
Sample No.	: LF023860209 - 2	Instrument	: HaasSuite(EVERFINE)
Manufacturer	: SPL	Test by	: Marc
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 57254 (87%)
Test Mode	: Fast Test	T	: 106 ms
		Sensitivity	: High

Spectrum

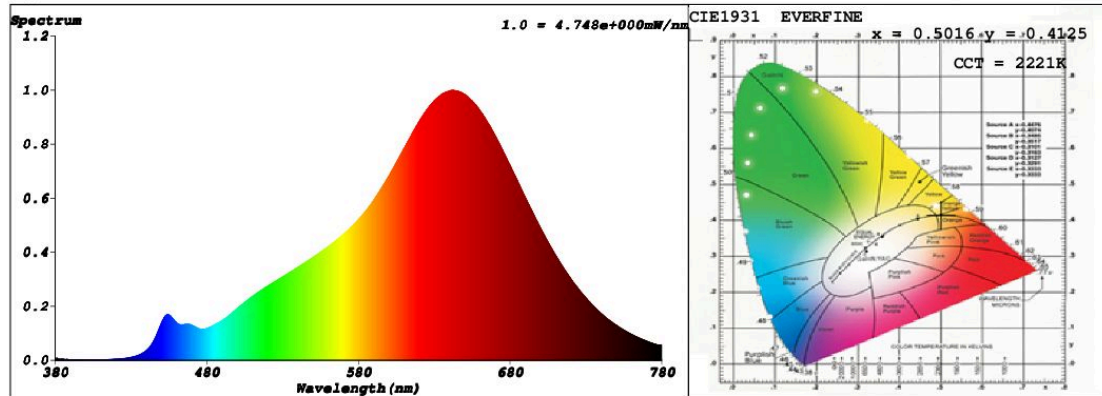

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.5016$ $y = 0.4125$ / $u' = 0.2888$ $v' = 0.5344$ ($duv = -8.84e-04$)

CCT= 2221K Prcp WL: $L_d = 587.4nm$ Purity=74.4%

Peak WL: $L_p = 641nm$ FWHM: $= 122.9nm$ Ratio: R=32.2% G=65.9% B=2.0%

Render Index: $R_a = 97.0$

R1 =98 R2 =98 R3 =99 R4 =98 R5 =98 R6 =94 R7 =96

R8 =95 R9 =90 R10=97 R11=94 R12=89 R13=98 R14=98 R15=98

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 161.96 lm Eff. : 62.59 lm/W $F_e = 702.34$ mW


Electrical parameters

V = 240.0 V I = 0.01215 A P = 2.588 W PF = 0.8873

Schiefer Professional Lighting

www.professional-lighting.eu

Model placed on the Union market from 01/09/2021



EPREL registration number: 831759

<https://eprel.ec.europa.eu/qr/831759>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands