

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

Model identifier: LF023880608

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	400 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W	5,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions	Height	Spectral power distribution in the	See image in last page
	Width		
			95

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	95	range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,481
Parameters for LED and OLED light sources:				
R9 colour rendering index value	60	Survival factor		0,96
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses		6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)		-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)		0,3

(a)-: not applicable;

(b)-: not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2021-04-21 15:24:53
Specification	: LF023880608	Sam. Status	:
Sample No.	: LF023880608-1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 51634 (79%)
Test Mode	: Fast Test	T	: 52 ms
		Sensitivity	: High

Spectrum

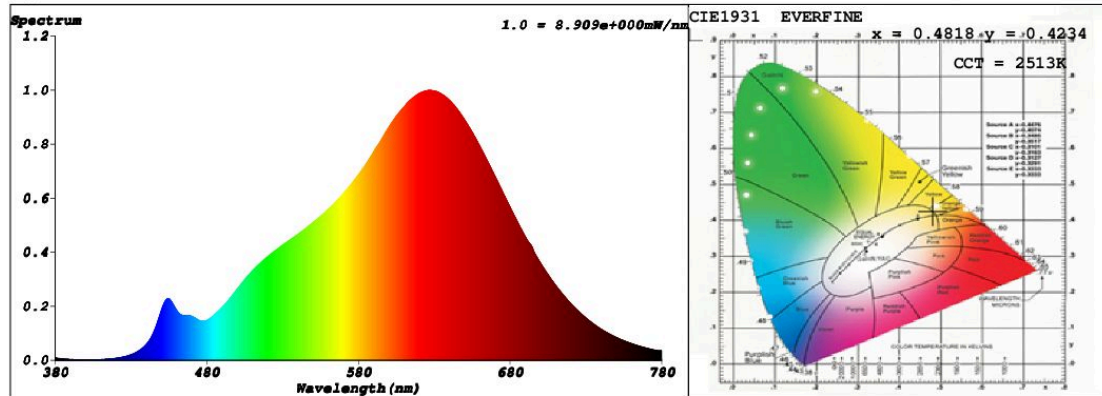

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4818$ $y = 0.4234$ / $u' = 0.2708$ $v' = 0.5354$ ($duv=3.11e-03$)

CCT= 2513K Prcp WL: $L_d=584.3nm$ Purity=71.7%

Peak WL: $L_p=628nm$ FWHM: $=138.5nm$ Ratio:R=28.0% G=69.9% B=2.1%

Render Index: $R_a = 93.4$

R1 =93 R2 =96 R3 =99 R4 =94 R5 =93 R6 =98 R7 =93

R8 =82 R9 =60 R10=91 R11=96 R12=85 R13=94 R14=98 R15=88

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 381.97 lm Eff. : 75.32 lm/W Fe = 1.3808 W

Electrical parameters

V = 230.0 V I = 0.02520 A P = 5.071 W PF = 0.8750

Schiefer Professional Lighting

www.spl-lighting.com