

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

**Model identifier:** LF023899905

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	450 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200
On-mode power ( $P_{on}$ ), expressed in W	6,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions	Height	Spectral power distribution in the	See image in last page
	Width		
			165

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	165	range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,506
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value		55	Survival factor	0,96
the lumen maintenance factor		0,96		
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )		0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,1	Stroboscopic effect metric (SVM)	0,3

(a)-: not applicable;

(b)-: not applicable;


## SPL Spectrum Test Report

Sample	:	Date	:	2021-03-23 12:56:55
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	Schiefer
		Assessor	:	damin

### Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	51161 (78%)
Test Mode	:	Fast Test	T	:	40 ms
			Sensitivity	:	High

### Spectrum

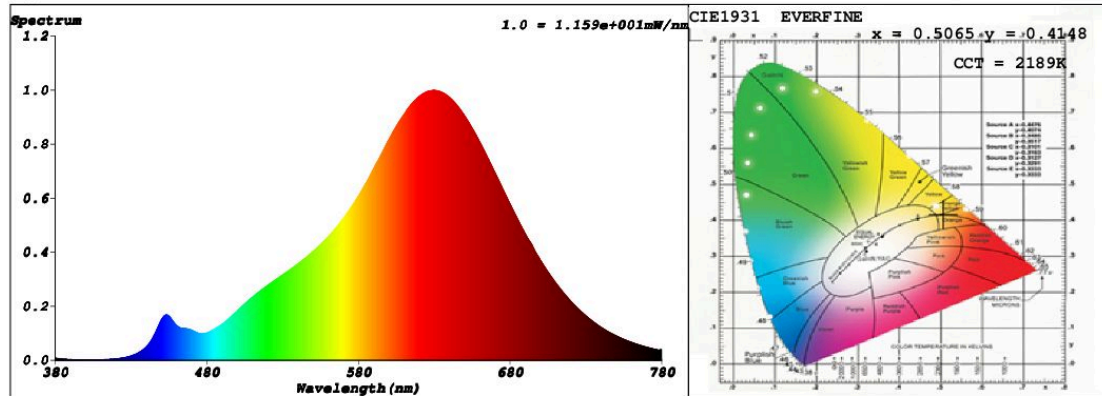

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.5065$   $y = 0.4148$  /  $u' = 0.2909$   $v' = 0.5360$  ( $duv = -1.08e-04$ )

CCT= 2189K Prcp WL:  $L_d = 587.4nm$  Purity=76.5%

Peak WL:  $L_p = 629nm$  FWHM: =120.7nm Ratio:R=31.8% G=66.5% B=1.7%

Render Index:  $R_a = 92.3$

R1 =93 R2 =98 R3 =98 R4 =92 R5 =93 R6 =98 R7 =89

R8 =78 R9 =55 R10=94 R11=95 R12=91 R13=94 R14=99 R15=87

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 431.12 lm Eff. : 68.87 lm/W  $F_e = 1.6610 W$

### Electrical parameters

V = 229.9 V I = 0.03192 A P = 6.260 W PF = 0.8529

**Schiefer Professional Lighting**

[www.spl-lighting.com](http://www.spl-lighting.com)