

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023911305

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	140 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 000
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	325	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	125	
	Depth	125	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,535 0,412
Parameters for LED and OLED light sources:			
R9 colour rendering index value	86	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:		Date	:	2021-03-17 16:22:02
Specification	:	LF023911305	Sam. Status	:	
Sample No.	:	LF023911305 01	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:		Test by	:	Schiefer
			Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	53864 (82%)
Test Mode	:	Fast Test	T	:	100 ms
			Sensitivity	:	High

Spectrum

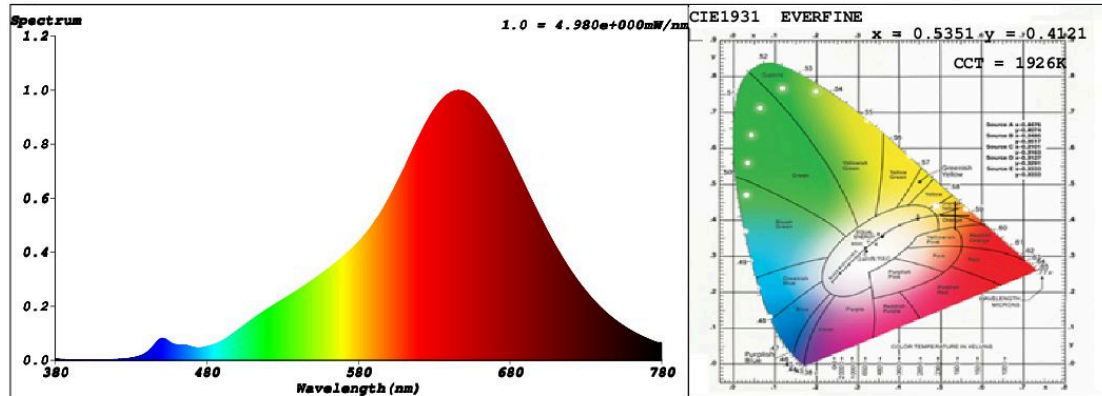

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.5351$ $y = 0.4121$ / $u' = 0.3113$ $v' = 0.5395$ ($duv = -8.73e-05$)

CCT= 1926K Prcp WL: Ld=589.6nm Purity=84.3%

Peak WL: Lp=646nm FWHM: =113.8nm Ratio:R=36.3% G=62.6% B=1.1%

Render Index: Ra = 97.6

R1 =100 R2 =100 R3 =96 R4 =98 R5 =100 R6 =97 R7 =96

R8 =94 R9 =86 R10=97 R11=94 R12=96 R13=100 R14=96 R15=96

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 142.06 lm Eff. : 37.58 lm/W Fe = 680.70 mW

Electrical parameters

V = 229.9 V I = 0.01974 A P = 3.780 W PF = 0.8332

Schiefer Professional Lighting

www.spl-lighting.com