

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023981305

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 000
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	340	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	180	
	Depth	180	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,528 0,417
Parameters for LED and OLED light sources:			
R9 colour rendering index value	17	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2021-04-22 15:10:44
Specification	: LF023981305	Sam. Status	:
Sample No.	: LF023981305 01	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 55913 (85%)
Test Mode	: Fast Test	T	: 63 ms
		Sensitivity	: High

Spectrum

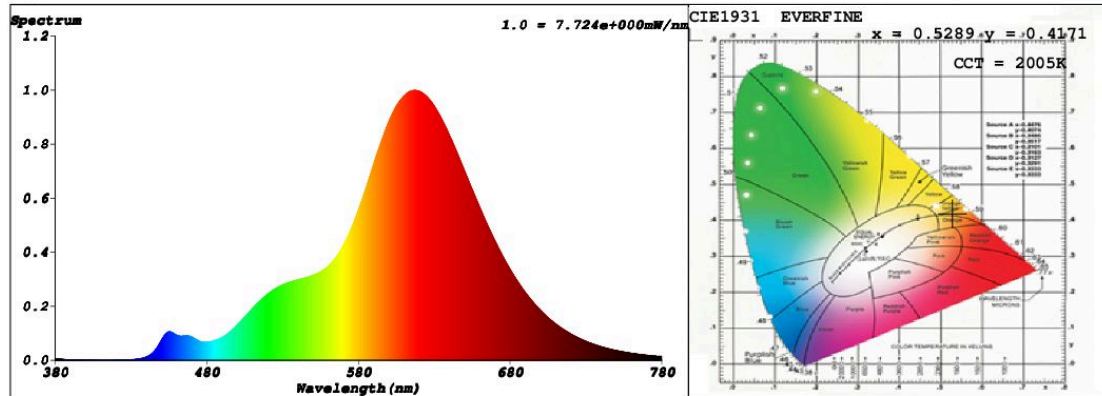

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.5289$ $y = 0.4171$ / $u' = 0.3045$ $v' = 0.5403$ ($duv=1.19e-03$)

CCT= 2005K Prcp WL: $L_d=588.5nm$ Purity=83.9%

Peak WL: $L_p=617nm$ FWHM: =89.3nm Ratio:R=34.5% G=64.3% B=1.2%

Render Index: $R_a = 85.6$

R1 =87 R2 =97 R3 =93 R4 =88 R5 =89 R6 =95 R7 =79

R8 =58 R9 =17 R10=93 R11=94 R12=91 R13=90 R14=97 R15=75

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 260.82 lm Eff. : 64.44 lm/W $F_e = 891.10$ mW

Electrical parameters

V = 230.0 V I = 0.02021 A P = 4.047 W PF = 0.8704

Schiefer Professional Lighting

www.spl-lighting.com