

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** LV024026502

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba15d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	140 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power ( $P_{on}$ ), expressed in W	1,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,476 0,412
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	57	Survival factor	0,96
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


## SPL Spectrum Test Report

Sample	:	Date	: 2021-03-23 10:51:31
Specification	: LV024026502	Sam. Status	:
Sample No.	: LV024026502 02	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 49092 (75%)
Test Mode	: Fast Test	T	: 164 ms
		Sensitivity	: High

### Spectrum

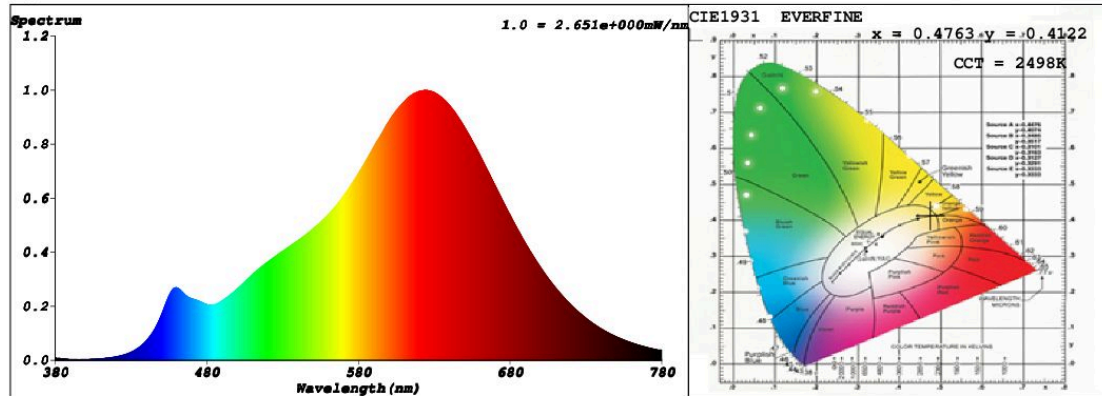

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4763$   $y = 0.4122$  /  $u' = 0.2724$   $v' = 0.5304$  ( $duv = -4.97e-04$ )

CCT= 2498K Prcp WL: Ld=585.5nm Purity=66.7%

Peak WL: Lp=624nm FWHM: =131.0nm Ratio:R=28.4% G=69.1% B=2.5%

Render Index: Ra = 92.4

R1 =94 R2 =99 R3 =96 R4 =92 R5 =94 R6 =96 R7 =89

R8 =78 R9 =57 R10=98 R11=95 R12=88 R13=96 R14=99 R15=88

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 112.60 lm Eff. : 66.86 lm/W Fe = 410.57 mW

### Electrical parameters

V = 229.9 V I = 0.01563 A P = 1.684 W PF = 0.4686

**Schiefer Professional Lighting**

[www.spl-lighting.com](http://www.spl-lighting.com)