

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L571235930

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	G53		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	690 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	12,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	67	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	111	
	Depth	111	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,439 0,406
Parameters for directional light sources:			
Peak luminous intensity (cd)	1 300	Beam angle in degrees, or the range of beam angles that can be set	35
Parameters for LED and OLED light sources:			
R9 colour rendering index value	96	Survival factor	1,00
the lumen maintenance factor	0,75		

(a) : not applicable;

(b) : not applicable;


SPL Spectrum Test Report

Sample	:		Date	:	2021-07-19 14:39:06
Specification	:	L571235930	Sam. Status	:	
Sample No.	:		Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:		Test by	:	Renee
			Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	47659 (73%)
Test Mode	:	Fast Test	T	:	33 ms
			Sensitivity	:	High

Spectrum

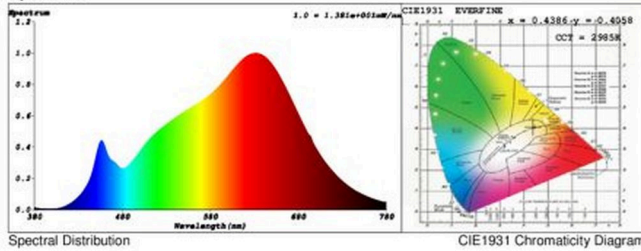

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4386$ $y = 0.4058$ / $u' = 0.2509$ $v' = 0.5223$ ($duv=4.51e-04$)
 CCT= 2985K Prcp WL: Ld=582.7nm Purity=53.5%
 Peak WL: Lp=632nm FWHM: =170.0nm Ratio:R=24.8% G=72.1% B=3.1%

Render Index: Ra = 97.0

R1 =98 R2 =99 R3 =98 R4 =97 R5 =97 R6 =98 R7 =96
 R8 =92 R9 =82 R10=96 R11=99 R12=86 R13=98 R14=98 R15=96
 LEVEL:OUT WHITE:ANSI_3000K


Photometric & Radiometric Parameters

Flux = 667.88 lm Eff. : 86.52 lm/W $F_e = 2.4579$ W

Electrical parameters

V = 11.90 V I = 0.6988 A P = 7.719 W PF = 0.9283

Model placed on the Union market from 01/09/2021



EPREL registration number: 832717

<https://eprel.ec.europa.eu/qr/832717>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands