

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

**Model identifier:** LF023860502

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power ( $P_{on}$ ), expressed in W	5,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions	Height	Spectral power distribution in the	See image in last page
	Width		
			58

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	58	range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,479
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value		58	Survival factor	0,96
the lumen maintenance factor		0,96		
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )		0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,1	Stroboscopic effect metric (SVM)	0,3

(a)-: not applicable;

(b)-: not applicable;


## SPL Spectrum Test Report

Sample	:	Date	:	2018-08-09 09:06:21
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	
		Assessor	:	damin

### Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	56068 (86%)
Test Mode	:	Fast Test	T	:	42 ms
			Sensitivity	:	High

### Spectrum

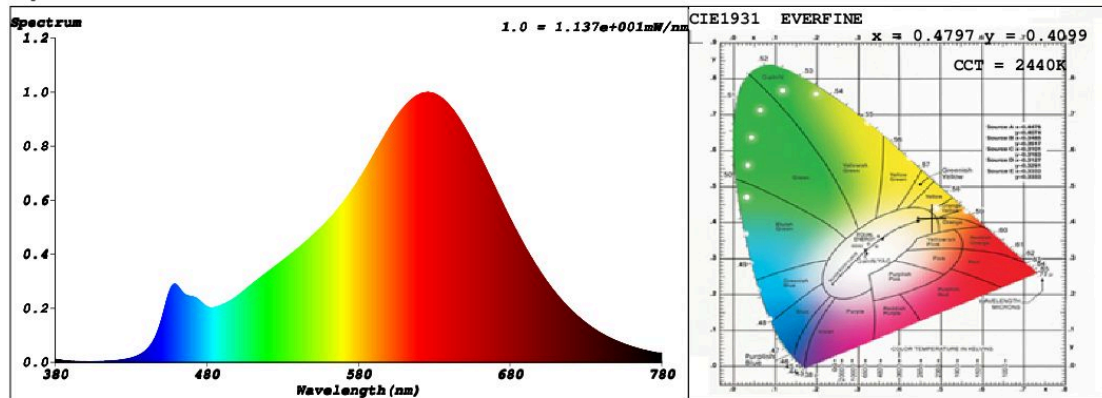

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4797$   $y = 0.4099$  /  $u' = 0.2757$   $v' = 0.5301$  ( $duv = -1.41e-03$ )

CCT= 2440K Prcp WL: Ld=586.1nm Purity=67.1%

Peak WL: Lp=625nm FWHM: =127.7nm Ratio:R=29.1% G=68.4% B=2.5%

Render Index: Ra = 91.9

R1 =94 R2 =100 R3 =95 R4 =91 R5 =94 R6 =95 R7 =88

R8 =78 R9 =58 R10=99 R11=93 R12=86 R13=96 R14=98 R15=89

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 469.19 lm Eff. : 87.17 lm/W Fe = 1.7219 W

### Electrical parameters

V = 230.1 V I = 0.02720 A P = 5.382 W PF = 0.8599

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)