

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF023870688

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W	6,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	105	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	60	
	Depth	60	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,495 0,420
Parameters for LED and OLED light sources:			
R9 colour rendering index value	62	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;

SPL Spectrum Test Report

Sample :
 Specification : L022366037
 Sample No. : LF023870608-2
 Manufacturer :


Date : 2020-07-21 13:45:46
 Sam. Status :
 Instrument : HaasSuite(EVERFINE)
 Test by : Schiefer
 Assessor : damin

Test Condition

Temperature : 25.3Deg
 WL Range : 380nm-780nm
 Test Mode : Fast Test

RH : 65.0%
 IP : 51812 (79%)
 T : 40 ms
 Sensitivity : High

Spectrum

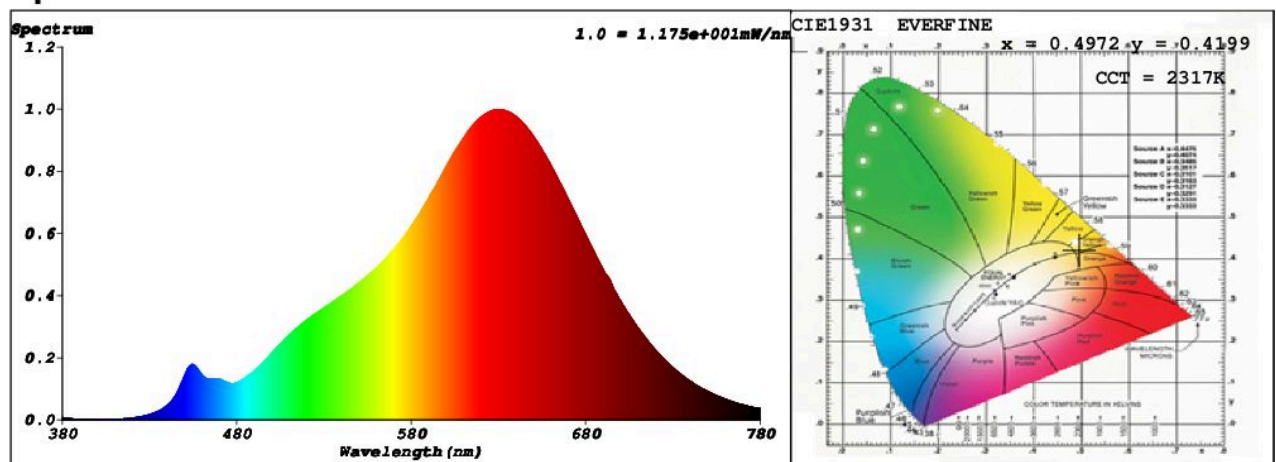

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4972$ $y = 0.4199$ / $u' = 0.2823$ $v' = 0.5365$ ($duv=1.51e-03$)
 CCT= 2317K Prcp WL: $L_d=586.0nm$ Purity=75.3%
 Peak WL: $L_p=630nm$ FWHM: $=127.2nm$ Ratio:R=30.3% G=67.8% B=1.8%

Render Index: $R_a = 94.4$

R1 =95 R2 =98 R3 =100 R4 =95 R5 =95 R6 =99 R7 =92
 R8 =82 R9 =63 R10=94 R11=98 R12=90 R13=96 R14=99 R15=89
 LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 458.53 lm Eff. : 76.02 lm/W $F_e = 1.7458 W$

Electrical parameters

V = 229.8 V I = 0.03427 A P = 6.032 W PF = 0.7658

Schiefer Professional Lighting

www.spl-lighting.com