

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SG

**Supplier's address:** Peter Sjøe Mikkelsen - R&D, Skytterheia 25, 4790 Lillesand, NO

**Model identifier:** 907013 - S04UDA250CWCB200

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	N/A		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	270 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	4,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	29	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	48	
	Depth	48	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,389 0,385
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	529	Beam angle in degrees, or the range of beam angles that can be set	31
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	60	Survival factor	0,90
the lumen maintenance factor	0,96		

(a): not applicable;

(b): not applicable;

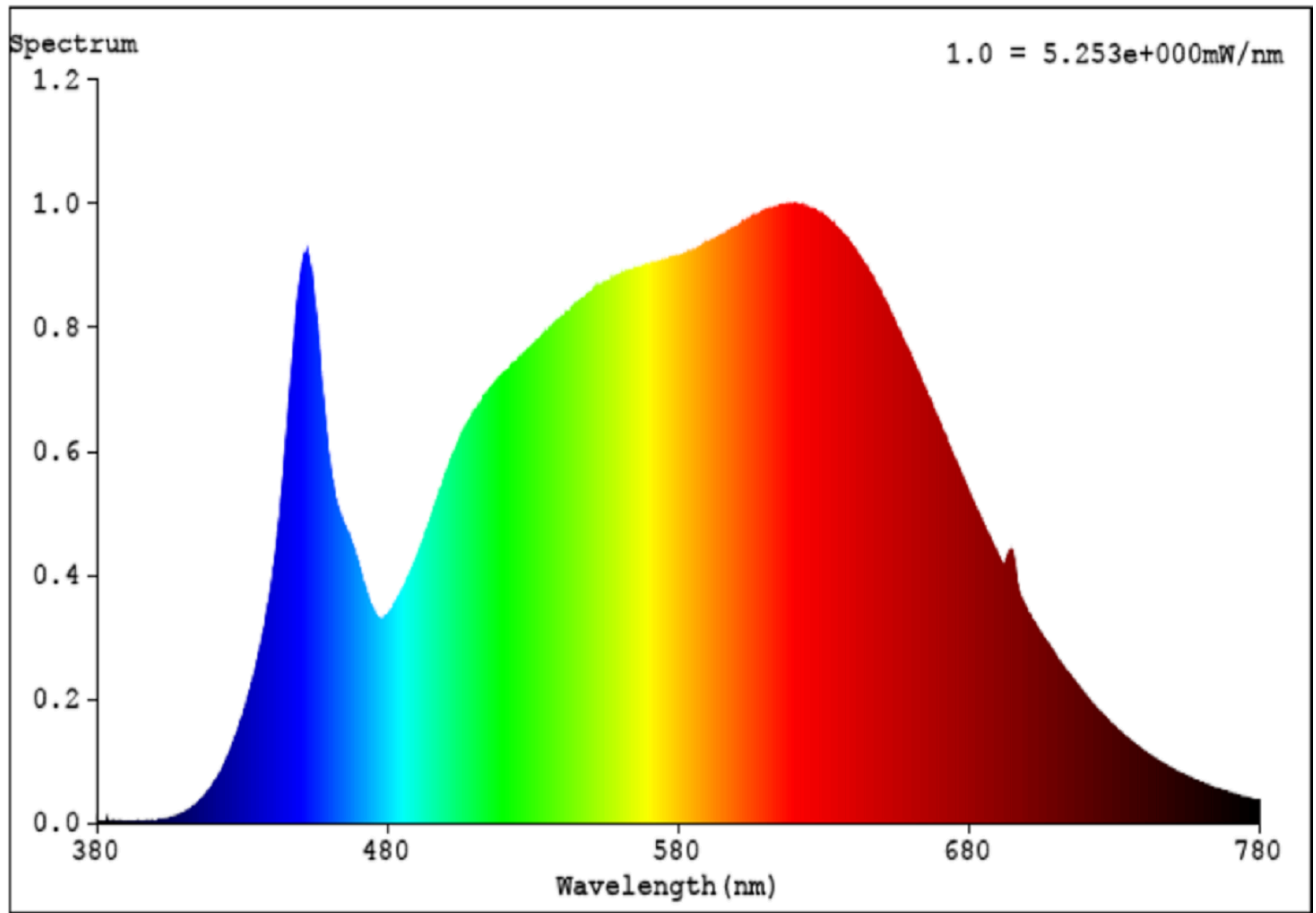

Model placed on the Union market from 09/08/2019



**EPREL registration number:** 911540

<https://eprel.ec.europa.eu/qr/911540>

**Supplier:** SG Armaturen AS (Importer)

**Website:** [www.sg-as.com](http://www.sg-as.com)

**Customer care service:**

**Name:** Peter Søre Mikkelsen - R&D

**Website:**

**Email:** [peter.soe.mikkelsen@sg-as.dk](mailto:peter.soe.mikkelsen@sg-as.dk)

**Phone:** +4563181560

**Address:**

Skytterheia 25  
4790 Lillesand  
Norway