
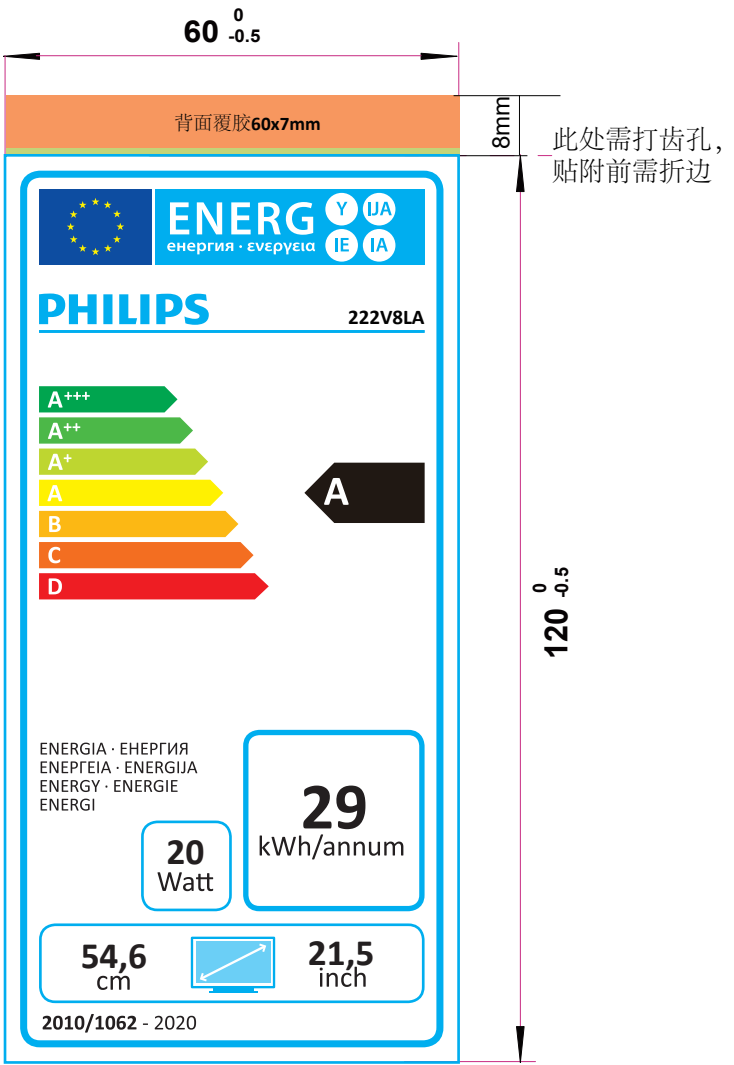
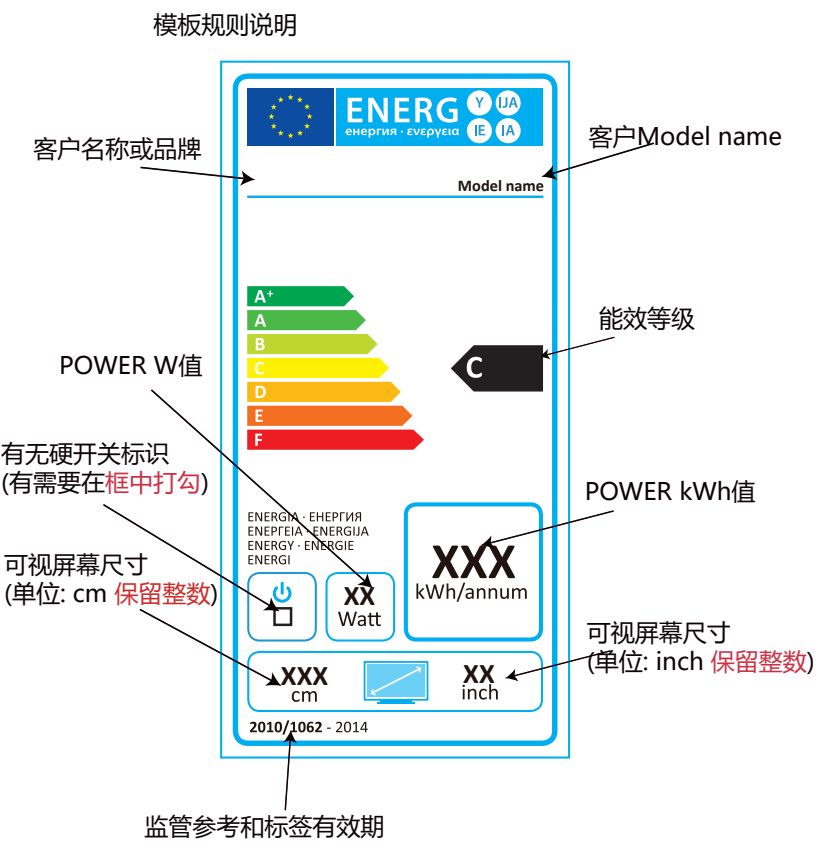


label 料号： label Part NO.:	
D40G000361561A	
客 户 Customer	PHILIPS
型 号 Model	222V8LA EEI LABEL
销 向 Sales Area	EU
安规签核Safety parts: Yes No ☐	
内销中文字体要求高度1.8mm以上 Yes No ☐	
针对带有UL logo的标签，其厂家须在最小包装上标示UL Recognized Component Mark  公司名称，型号及 UL file no.	
条码印刷： barcode print: 1. 所有条码读码等级：C级及以上，客户有特殊要求除外；	
REVISION VERSION A 版本变更说明： Version Changed Description:	
备注Remark: xiaohong.lin Nov-12-20	
捷联电子（福建）有限公司 TPV Electronics (Fujian) Co., Ltd. 地址(Add): 中国福建省福清市元洪路上郑Shangzheng,Yuanhong Road, Fuqing City, Fujian Province, China 电话(Tel): +86-591-85285555 85285559 传真(Fax): +86-591-85285447 邮编(Postcode): 350301	

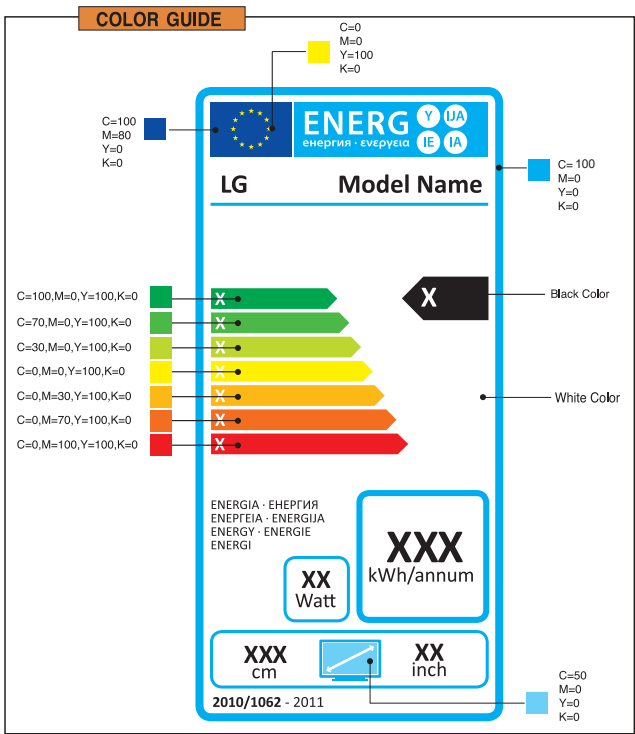

NOTE:

- 1.印刷如下图
Printing as the drawing
- 2.尺寸:具体见上图所示(公差: $\pm 0/-0.5\text{mm}$)
Dimension: as the above drawing (Tolerance: $\pm 0/-0.5\text{mm}$)
- 3.材质: 50#白色PET 表面覆膜, 背面覆胶, 贴于中框胶花面上, 撕下时背胶不可遗留在中框上)
- 4.颜色: 如图所示
Color: See the drawing
- 5.黏力: 将label切成25mm宽, 一端粘贴于钢板上, 以 180° 方向的力拉胶带另一端, 所得拉力即为黏力。用黏力测试仪进行测试。
Stickiness strength : Cut label into 25mm width ,one end paste on the plate , with 180° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
- 6.正常耐温测试: 在钢板上耐温范围为 $-20\sim 100^\circ\text{C}$, 在 $80\sim 100^\circ\text{C}$ 保持8小时不翘角, 不分层, 不脱落, 不起泡等。
在塑胶、纸箱上耐温范围为 $-20\sim 65^\circ\text{C}$, 在 65°C 保持8小时不翘角, 不分层, 不脱落, 不起泡等。
The normal temperature test: The range of temperature on plate is $-20 \sim 100^\circ\text{C}$. In $80 \sim 100^\circ\text{C}$ to maintain 8 hours , the label should not be warp, delamination, frothy and so on. The range of temperature on plastic and carton is $-20 \sim 65^\circ\text{C}$. In 65°C to maintain 8 hours , the label should not be warp, delamination, frothy and so on.
- 7.耐温湿度循环测试: 循环条件(贴在塑胶胶花面(PET)贴在塑胶胶花面): 温度 $-20\sim 65^\circ\text{C}$, 湿度 $30\sim 90\%$, 时间 96小时不翘角不分层不脱落不起泡等。
Temperature and humidity cycle test : Cycle conditions(stick on texture(PET) , stick on texture): In temperature of $-20 \sim 65^\circ\text{C}$ and humidity of $30\sim 90\%$ to maintain 96 hours , the label should not be warp, delamination, frothy and so on.
- 8.裁切需均匀且印刷不可有溢墨及颜色不均等不良现象
Printing ink can not have overflow and printing color can not be uneven etc.
9. 其它测试要求详见 (FQ-背胶类产品测试检验规格)

1) 根据 TPV 推行 RoHS 的有关规定,
所有的原材料及辅助材料必须符合 RoHS 的有关规定

2) 所有原材料的规定物质: 如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's
及镉 (Cd)+汞 (Hg)+铅 (Pb)+六价铬 (针对随机出货的包装材料) 的具体含
量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求
执行

1)According to the rule about RoHS of TPV,All raw material and assistant material and assistant material should accord with the rule of RoHS

2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.